


SUNSHADOW RR Series (Screen Trend)

3 % Openness

Composition: 25% Polyester / 75% PVC
 Width: 2000mm, 2500mm & 3000mm
 Weight: 410gsm \pm 5%
 Thickness: 0.57mm \pm 5%
 Tensile Strength Warp152 / Weft 180 daN/5cm
 Tearing Strength Warp 4.7 / Weft 5.0 daN
 Colourfastness: Grade 8 (ISO 105 B02, Xenarc lamp)
 Assembly: Ultrasonic, Knife, Crush or Pressure Cut
 Roll Size: 30 Lineal Metres
 Care Label: Screen - Sunscreen

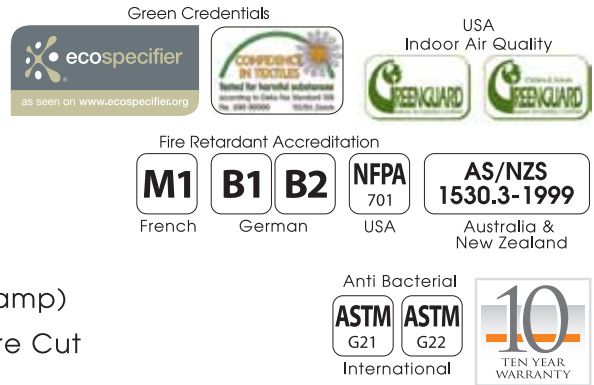


Solar Optical Properties


		Solar Reflection (Rs)%	Solar Absorption (As)%	Solar Transmission (Ts)%	Visible Light Transmission (TV)%	Ultraviolet Transmittance (Tuv)%	Shading Coefficient SC
Available widths 2000mm, 2500mm & 3000mm							
RR10	White	66	15	19	13	3	.34
RR12	White/Linen	58	27	15	9	2	.39
RR20	Linen	50	36	14	8	3	.44
RR71	Charcoal/Apricot	17	79	4	4	3	.65
RR72	Charcoal/Sable	15	81	4	5	3	.66
RR84	Bronze/Grey	12	85	3	3	2	.68
RR89	Charcoal/Bronze	7	90	3	3	3	.71
RR90	Charcoal	4	92	4	4	3	.73
RR94	Charcoal/Grey	9	86	5	5	4	.70
RRE4	Charcoal/Slate Grey	7	87	6	9	6	.72

Available width 2500mm


RR11	White/Apricot	54	34	12	7	2	.41
RR13	White/Pearl	50	37	13	9	3	.44
RR23	Linen/Pearl	44	44	12	8	3	.48
RR28	Beige/Bronze	26	69	5	4	2	.59
RRE3	Pearl	37	52	11	11	5	.53
RR44	Mid Grey	24	69	7	5	3	.61
RR46	Grey Blue	13	82	5	4	3	.68
RR82	Bronze/Mustard	20	76	4	4	3	.63
RR98	Charcoal/Sand	22	79	5	4	3	.65




Rs = Ratio of the amount of total solar energy which is reflected.




Ts = Ratio of the amount of total solar energy which is transmitted.



Openness Factor = Measures the proportion of holes in the fabric. Determining the degree of visibility, heat and glare control.



As = Ratio of the amount of total solar energy which is absorbed.



Tv = Measures the % of visible light coming through the window and fabric.

Shading Coefficient = measures the efficiency of the fabric in filtering heat coming from solar radiation. This figure ranges between 0-1 a low figure shows excellent protection against incoming heat. Results shown were determined using 1/8 inch double strength glass.

Another product proudly supplied to you by the partnership of

